


VIS SIX PANS CREUX CYLINDRIQUE CHC NFE 25125 DIN 912 CLASSE 8,8

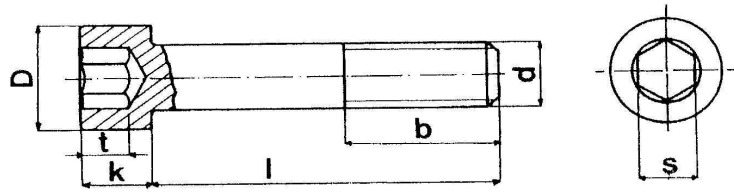

| Ø nominal | 3 | 4 | 5 | 6 | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 22 | 24 | |
|----------------|------|-----|-----|----|----|----|----|----|----|----|----|----|----|---------|
| D | 5,68 | 7 | 8,5 | 10 | 13 | 16 | 18 | 21 | 24 | 27 | 30 | 33 | 36 | |
| k | 3 | 4 | 5 | 6 | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 22 | 24 | |
| s | 2,5 | 3 | 4 | 5 | 6 | 8 | 10 | 12 | 14 | 14 | 17 | 17 | 19 | |
| t min | | 2 | 2,5 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | | 12 | |
| b | 18 | 20 | 22 | 24 | 28 | 32 | 36 | 40 | 44 | 48 | 52 | 56 | 60 | BOITAGE |
| L = Longueur 8 | | | | | | | | | | | | | | 500 |
| 10 | | | | | | | | | | | | | | 200 |
| 12 | | | | | | | | | | | | | | 200 |
| 14 | | | | | | | | | | | | | | 200 |
| 16 | | | | | | | | | | | | | | 200 |
| 20 | | | | | | | | | | | | | | 100 |
| 25 | | | | | | | | | | | | | | 50 |
| 30 | | | | | | | | | | | | | | 50 |
| 35 | | | | | | | | | | | | | | 50 |
| 40 | | | | | | | | | | | | | | 50 |
| 45 | | | | | | | | | | | | | | 25 |
| 50 | | | | | | | | | | | | | | 25 |
| 55 | | | | | | | | | | | | | | 25 |
| 60 | | | | | | | | | | | | | | 25 |
| 65 | | | | | | | | | | | | | | 25 |
| 70 | | | | | | | | | | | | | | 25 |
| 75 | | | | | | | | | | | | | | 25 |
| 80 | | | | | | | | | | | | | | 25 |
| 90 | | | | | | | | | | | | | | 25 |
| 100 | | | | | | | | | | | | | | 25 |
| 110 | | | | | | | | | | | | | | 25 |
| 120 | | | | | | | | | | | | | | 25 |
| 130 | | | | | | | | | | | | | | 20 |
| 140 | | | | | | | | | | | | | | 20 |
| 150 | | | | | | | | | | | | | | 20 |
| 160 | | | | | | | | | | | | | | 20 |
| 180 | | | | | | | | | | | | | | 20 |
| 200 | | | | | | | | | | | | | | 20 |
| BOITAGE | 500 | 200 | 100 | | | | 50 | | | 25 | | | | 20 |